



M-DRIVER-36-CV-3WY

LIGHTING DRIVER SOLUTIONS FOR METRO 3-WAY OUTLETS

Metro ELV Constant Voltage*, Class 2, Dimmable LED Drivers (36W, 24/12 V DC). Fireproof, Environmentally friendly PC cover. Short Circuit and overload protected. Integral wiring compartment.

* Constant Current Versions are available, not shown.


Features:

Input Voltage	100-277 VAC
Output Voltage	12/24 V DC
Output Power	36W
AC Frequency	47-63 Hz
Power Factor	>.99
Operating Temp	-40°C - 60°C
Efficiency	>80%
Weight	7.05oz. (0.2Kg)
Lifetime	>50,000 hrs. @ Tc Max
Length	10.24" (260mm)
Width	1.18" (30mm)
Height	0.73" (18.5mm)

- FIREPROOF, ENVIRONMENTALLY FRIENDLY PC COVER
- CLASS 2
- UL LISTED
- SHORT CIRCUIT AND OVERLOAD PROTECTED
- INTEGRAL WIRING COMPARTMENT

M-DRIVER-36-CV-3WY

120 V AC
WIRING
COMPARTMENT

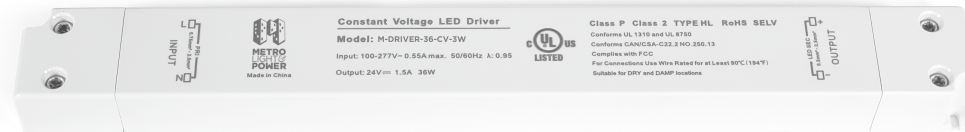

24 V DC
WIRING
COMPARTMENT

