



M-SENSOR-PIR

RECESSED PIR SENSOR FOR CLOSETS & CABINETS


For use with Metro M-LIGHT LEDs, M-LINEAR Fixtures, and M-DRIVER Power Supplies.

M-SENSOR-PIR

Features:

Working Voltage	10-24 V DC
Detection Methods	Dual passive infrared rectangle
Detecting Range	2m, and 40°
CONTROL BOX:	
Length	1.968" (50.000mm)
Width	1.181" (30.000mm)
Height	0.454" (11.550mm)


- RANGE UP TO 2m AND 40°
- DUAL PASSIVE INFRARED SENSOR SWITCH
- CAN BE POSITIONED INCONSPICUOUSLY
- MULTI-DIRECTIONAL WIREWAY
- FACTORY ADJUSTABLE "ON TIME", FROM 5s TO 60s ONCE ACTIVATED

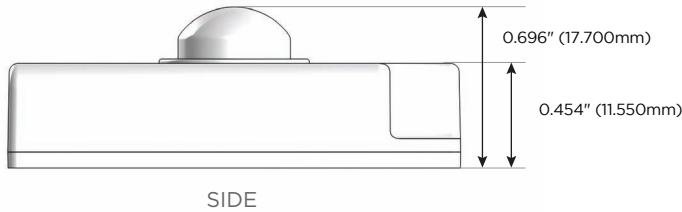


SIDE




TOP



END

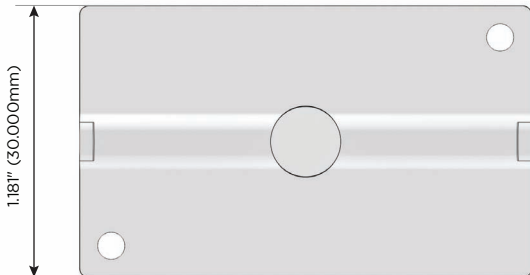

BOTTOM

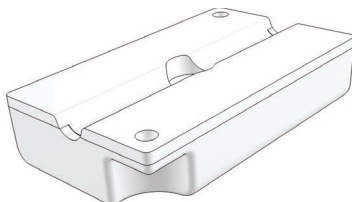

M-SENSOR-PIR

